

CR-20 and CR-30



Product No.	Colour	K	IP
-------------	--------	---	----

IP 44	CR 20			
	1545793	Gold	3000	44
	1545794	Gold	4000	44
	1545795	Chrome	3000	44
1545796	Chrome	4000	44	

IP 44	CR 30			
	1545797	Gold	3000	44
	1545798	Gold	4000	44
	1545799	Chrome	3000	44
1545800	Chrome	4000	44	

IP 67	CR 20			
	1545793	Gold	3000	67
1545795	Chrome	3000	67	

IP 67	CR 30			
	1545797	Gold	3000	67
1545799	Chrome	3000	67	

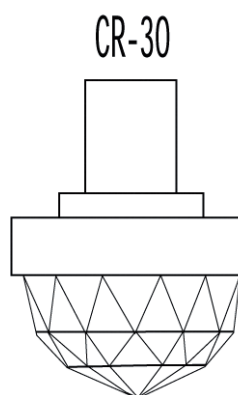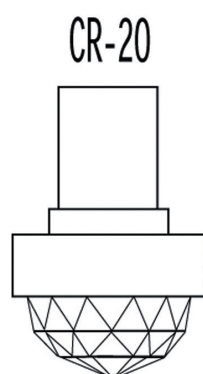



NB! Serial connection only.
IP 67 equipped with a 5m connection cable.

CR-20	Power	K	CRI	IP	Size
	1 W / 350 mA	3000 or 4000	> 85	44 or 67	Diameter 20 mm

CR-30	Power	K	CRI	IP	Size
	1 W / 350 mA	3000 or 4000	> 85	44 or 67	Diameter 30 mm

Ambient temperature 0°C ... 60°C

IP 44

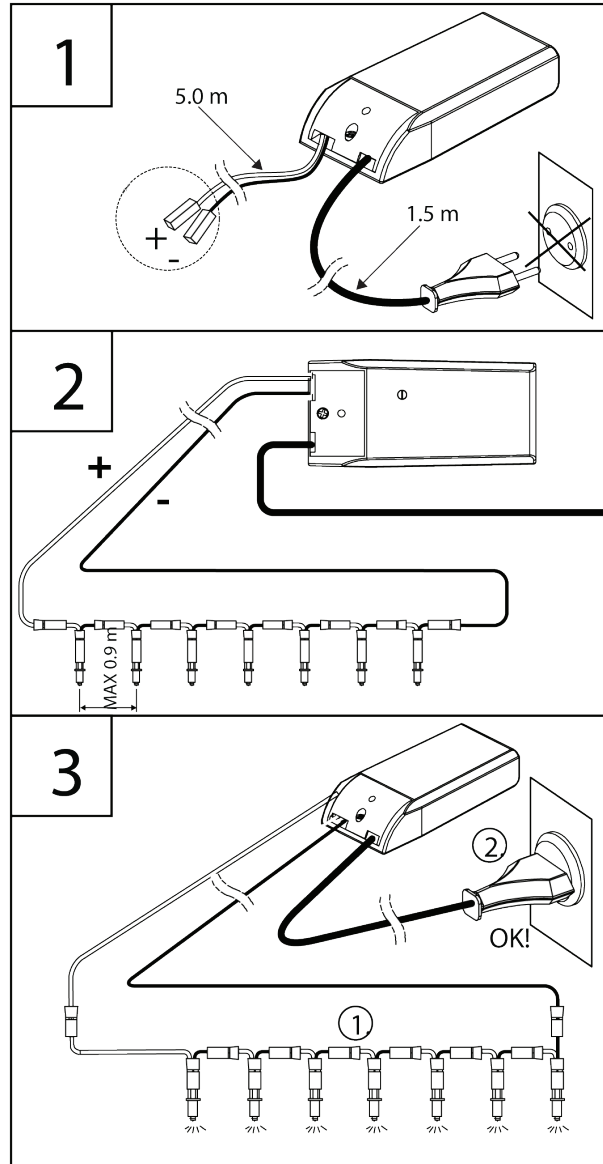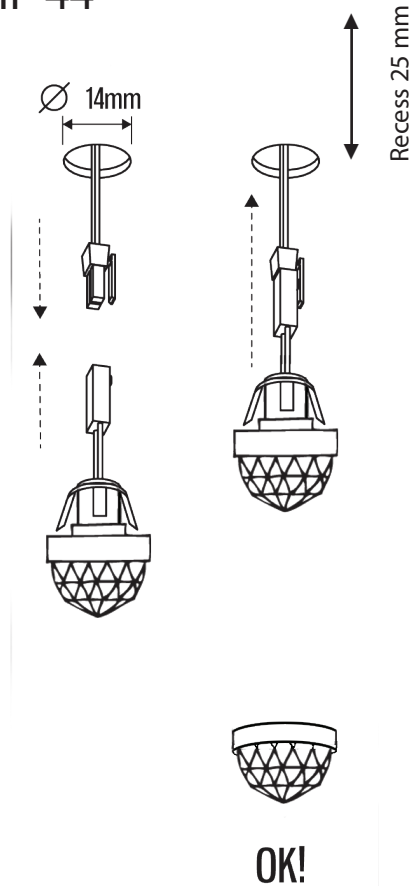



RECOMMENDED TRANSFORMER SETS:

Transformer	Product No.	Dimmer	Min lamps	Max lamps	IP
Osram OTe 9/220-240/350 PC	1532261	*	5	9	20
Osram OTe 15/220-240/350 PC	1532262	*	9	15	20
Osram OTe 20/220-240/350 PC	1532263	*	15	18	20
Osram OT 9/220-240/350 DIM	1532260	1 - 10 V	1	7	20

* Leading and Trailing Edge Dimmer.

* Power supply: Ambient temperature 0°C ... 45°C

IP 67

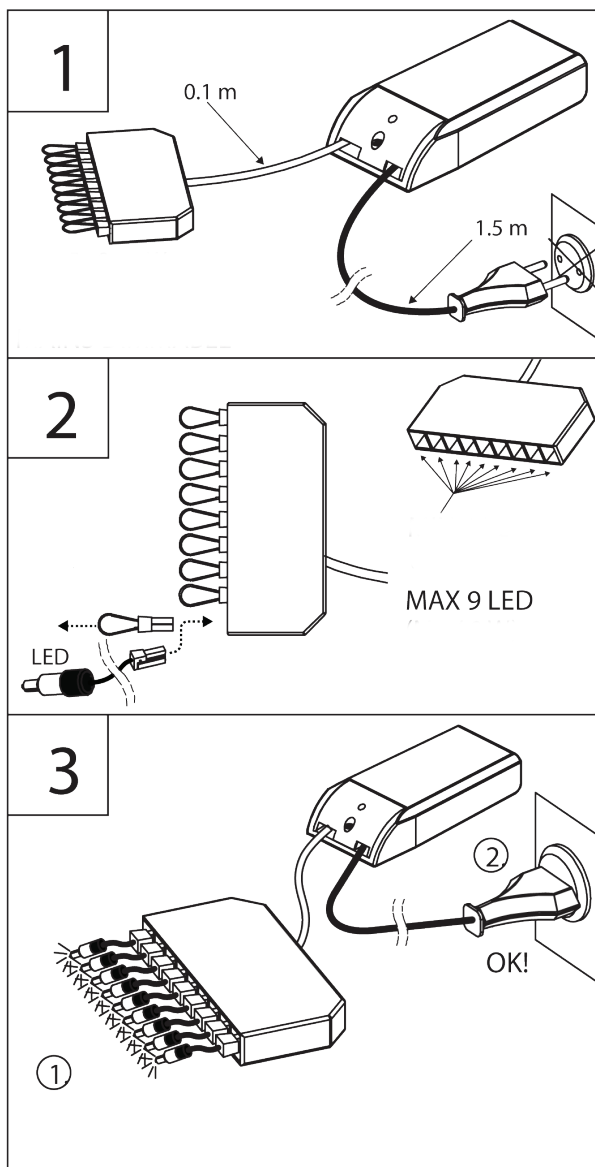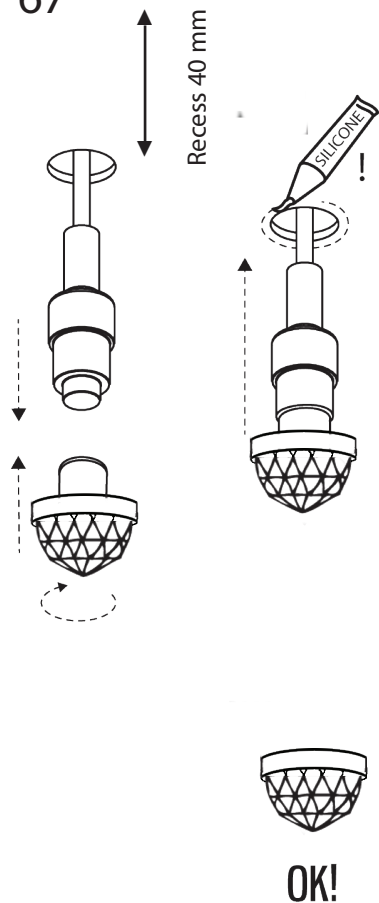

RECOMMENDED TRANSFORMER SETS:

Transformer	Product No.	Dimmer	Min lamps	Max lamps	IP
Osram OTe 9/220-240/350 PC	1532264	*	5	9	20
Osram OTe 15/220-240/350 PC	1532265	*	9	15	20
Osram OTe 20/220-240/350 PC	1532266	*	15	18	20
Osram OT 9/220-240/350 DIM	1532268	1 - 10 V	1	7	20

* Leading and Trailing Edge Dimmer.

* Power supply: Ambient temperature 0°C ... 45°C